

# DEXWIN® - PROFILE

## ENDLOSFASERVERSTÄRKTE THERMOPLASTISCHE HALBZEUGE CONTINUOUS FIBRE-REINFORCED THERMOPLASTIC SEMI-FINISHED PRODUCTS


### MATERIALIEN MATERIALS

<b>VERSTÄRKUNG</b> REINFORCEMENT	<b>ENDLOSFASERN</b> CONTINUOUS FIBRE	GLAS, KOHLENSTOFF, ARAMID GLASS, CARBON, ARAMIDE
	<b>GEWEBE (0°/90°)</b> FABRIC (0°/90°)	
	FASERVOLUMEN: 30 – 40 % FIBRE VOLUME: 30 – 40 %	
<b>THERMOPLASTISCHE MATRIX</b> THERMOPLASTIC MATRIX	PP, PE, PA (PA6, PA6.6), PBT, TPU, PET, ABS, PVDF	



### WERKZEUGÜBERSICHT TOOL OVERVIEW

		<b>PROFILBREITE</b> PROFILE WIDTH					
		10	15	18	20	25	60
<b>PROFILDICKE</b> PROFILE THICKNESS	0,3						
	0,4						
	0,5						
	1,3						
	2						
	3						
	4						
	10						

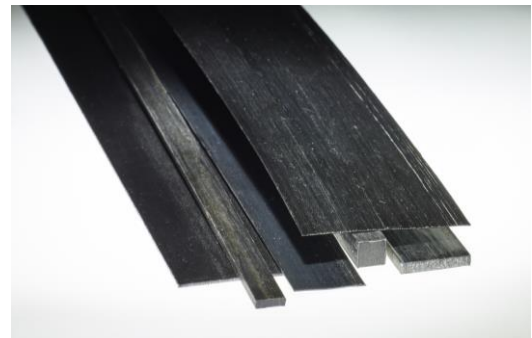

BREITE & DICKE IN [MM]  
WIDTH & THICKNESS IN [MM]

MAX. BREITE: 100 MM  
MAX. BREITE: 100 MM

MAX. QUERSCHNITT: 150 MM<sup>2</sup>  
MAX. SECTION: 150 MM<sup>2</sup>

UNSER PRODUKTPORTFOLIO ERWEITERT SICH STETIG.  
OUR PRODUCT PORTFOLIO INCREASES CONTINUOUSLY.

GERNE FERTIGEN WIR VON IHNEN GEWÜNSCHTE ABMESSUNGEN.  
WE ARE PLEASED TO PRODUCE DIMENSIONS ON DEMAND.